






# B SERIES

B90

B110

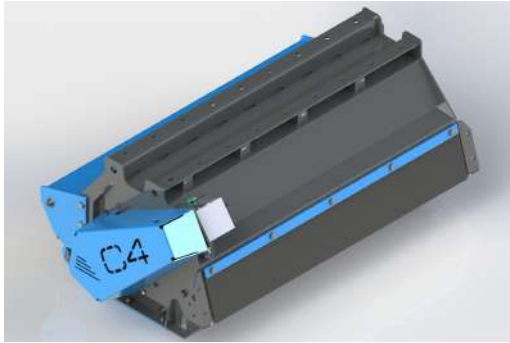

MODEL	B90	B110
CUTTING WIDTH (mm)	890	1070
RECOMMENDED EXCAVATOR (ton)	3-4	3.5-5
WEIGHT (Kg)	205	235
OIL PRESSURE (bar)	200	200
OIL FLOW (l/min)	30-80	40-80
NUMBER OF KNIVES	36	48
NUMBER OF HAMMERS	12	16
MAX CUTTING DIAMETER (mm)	50	50
A DIMENSION (mm)	710	710
B DIMENSION (mm)	1015	1215
C DIMENSION (mm)	463	463
SELF-LEVELLING SUPPORT WEIGHT (Kg)	31	31
EXCAVATOR ATTACHMENT WEIGHT (min-max Kg)	12-20	12-20




# B-R SERIES

(Reversible - without support roller)

B90R

B110R

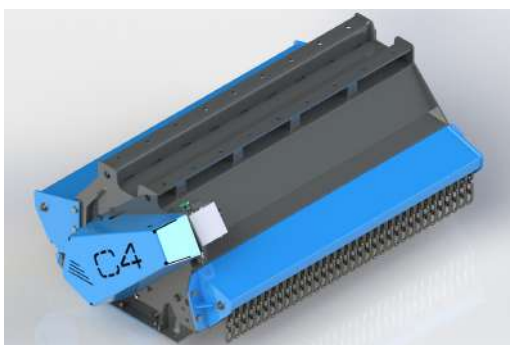

MODEL	B90R	B110R
CUTTING WIDTH (mm)	890	1070
RECOMMENDED EXCAVATOR (ton)	3-4	3.5-5
WEIGHT (Kg)	205	235
OIL PRESSURE (bar)	200	200
OIL FLOW (l/min)	30-80	40-80
NUMBER OF KNIVES	36	48
NUMBER OF HAMMERS	12	16
MAX CUTTING DIAMETER (mm)	50	50
A DIMENSION (mm)	810	810
B DIMENSION (mm)	1015	1215
C DIMENSION (mm)	463	463
SELF-LEVELLING SUPPORT WEIGHT (Kg)	31	31
EXCAVATOR ATTACHMENT WEIGHT (min-max Kg)	12-20	12-20

