
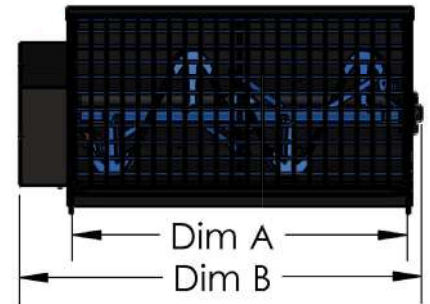



# BM SERIES

BM150/H  
BM200/H  
BM250/H  
BM350/H  
BM450/H


MODEL	BM150	BM200	BM250	BM350	BM450
MODEL (With tank in Hardox)	BM150H	BM200H	BM250H	BM350H	BM450H
A DIMENSION (mm)	1000	1250	1250	1350	1650
B DIMENSION (mm)	1260	1490	1490	1590	1890
C DIMENSION (mm)	560	560	620	730	730
D DIMENSION (mm)	630	630	730	840	840
WEIGHT (Kg)	200	310	350	450	510
FULL LOAD WEIGHT (Kg)	500	780	930	1250	1500
CAPACITY UP TO SCREW (lt)	150	200	250	350	450
MAX PRESSURE (bar)	140	140	140	140	140

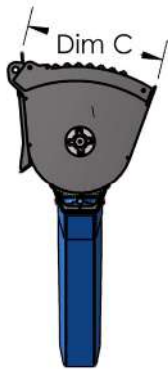

Orbital motor with relief valve integrated. Transmission with reducer.



Standard with 1.8mt hydraulic hoses. Quick couplings included.

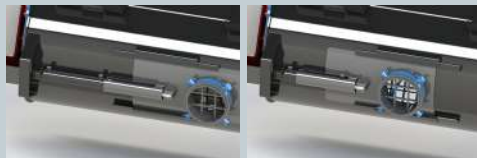

The particular configuration of the rotor and the mixing arms allows the drain connector to be in a central position, the discharge is opened by means of a hydraulic cylinder, controlled by a six-way solenoid valve.



Available with standard skid steer attachment, available as **optional**: customized skid-steer attachment. Available as **optional**: customized attachment with pins for excavator.



Available as **optional**: facilitated opening of the protection grid via gas shock absorbers and hydraulic auger locking device.



Slide with quick coupling, which can be positioned without the need to stand under the machine, thus avoiding dangerous situations.



Slide mounted on a swivel ring, which has the possibility of being rotated 360 degrees.