



# DMM SERIES

DMM120  
DMM130  
DMM140  
DMM160

MODEL	DMM120	DMM130	DMM140	DMM160
CUTTING WIDTH (mm)	1180	1280	1380	1580
WEIGHT (Kg)	420	450	470	485
OIL PRESSURE (bar)	200	200	200	200
OIL FLOW (l/min)	40-80	40-80	50-100	70-120
NUMBER OF KNIVES	36	36	42	48
NUMBER OF HAMMERS	12	12	14	16
MAX CUTTING DIAMETER (mm)	60	60	60	60
A DIMENSION (mm)	1070	1070	1070	1070
B DIMENSION (mm)	1375	1475	1575	1775
C DIMENSION (mm)	700	700	700	700

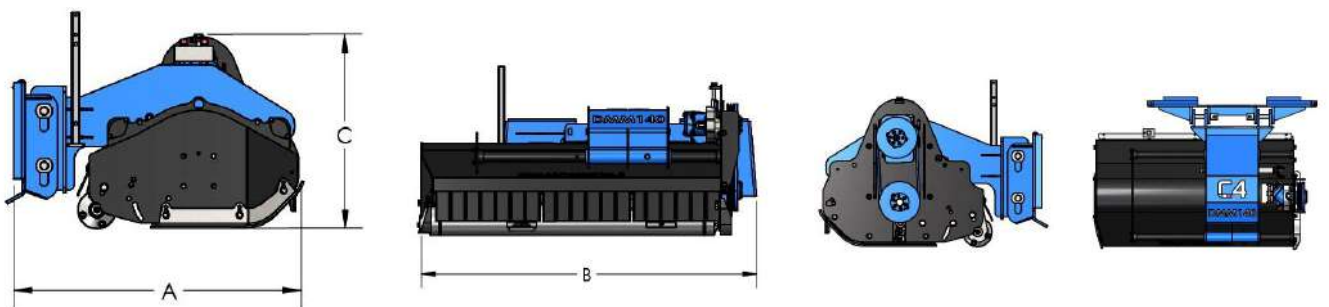

Replacable anti-wear skid, adjustable in three positions to vary the cutting height.



Oscillating attachment system with slotted pins to overcome easily uneven ground.



Standard with 2m hydraulic hoses. Available as **optional**: set of hoses with customized lengths.



Standard with skid-steer attachment, **optional**: customized attachment.



Hydraulic piston motor in upper position. Belt transmission, essential for applications where the transmitted powers begin increasing, thanks to the elastic joint that has the function to preserve both the motor and the rotor from unexpected stresses.



Hitch with 330mm width of lateral translation.



The translation is manual on 6 different positions. Available as **optional**: hydraulic translation with hydraulic cylinder. Available as **optional** 6-way valve electrically controlled if the machine does not have a free auxiliary system.